

IO-FRM4

Fan Speed Relay Module

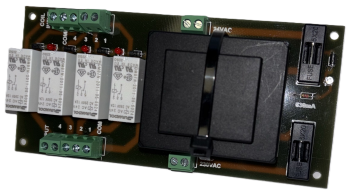

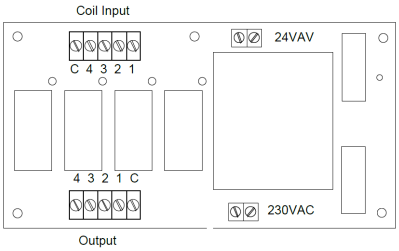

Features & Benefits

- Interlocked relays allow only one output at a time
- High and low Voltage relay coil options
- Mounting: DIN rail carrier or panel mount
- Switches up to 10 Amps
- LED indication

Technical Overview

The IO-FRM4 is an interlocked, four relay module. Intended for use as a fan speed switch, the unit can be used to change the fan speeds on fan motors with multi-tapped windings and also transformer speed controlled motors. The 'Change over' design of the relay contact configuration and common switching point ensure that the only set of contacts is active at any one time, thus preventing short circuits. The module can be panel mounted or DIN rail mounted.

General Information

Inputs	24VAC
Outputs	Common and 4 volt-free contact switched outputs
Power Supply Rating	24VAC 15VA fused 630mA
Contact Rating	10A @250Vac resistive (Inductive current depends on load– typically 5A inductive)
Terminals	Rising clamp for 0.5-2.5mm cable
Dimensions	72X155mm, Fits 72mm DIN rail carrier, Mounting hole 62mm x 145mm
Weight	482gms
Ambient Temperature	0-50°C
Country of origin	UK

Related Product Codes

IO-FRM4	Fan Speed Relay Module
IO-FRM4-T	Fan Speed Relay Module with Transformer

Tel: +44 (0)1732 861200 | E-mail: sales@sontay.com | Web: www.sontay.com

Sontay Limited. Four Elms Road, Edenbridge, Kent, TN8 6AB UK

© 2025 Sontay Limited. All rights reserved. Whilst every effort has been made to ensure the accuracy of this specification, Sontay cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.

Note: for all gas sensors, None of our devices are approved for use in life safety applications. This document is uncontrolled if printed. Generated on 25/02/25